



GimaGO

G0531B/C

net 
NEW ELECTRONIC TECHNOLOGY

AUDIOVIDEO SUPPLY

1-800-284-2288 sales@avsupply.com
www.avsupply.com


For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

TECHNICAL DATA




G0531B/C


- 1/1.8" Progressive Scan CCD Image Sensor
- Resolution 2.000.000, UXGA
- Gigabit ethernet interface
- G0531B = monochrome, G0531C = color
- External trigger
- Frame rate 16 fps
- Camera setting via gigabit ethernet interface
- Auto iris lens control
- Free application software and viewer



Spectral Sensitivity for G0531C

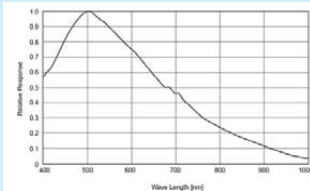

Spectral Sensitivity for G0531B

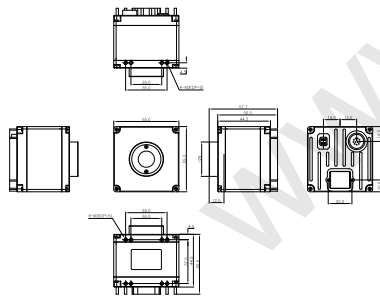

APPLICATION

- Machine vision
- Quality control
- Microscopy + Medical
- Factory automation
- Semi con inspection
- Barcode, OCR, OCV



	G0531B	G0531C
Resolution (HxV) [px]	1628 x 1236 / UXGA	
Sensor	CCD	
Image sensor	ICX274AL	ICX274AQ
Sensor size	1/1.8"	
Pixel size [µm]	4.40 x 4.40	
Frame rate [fps]	16	
Shutter speed	1 µs - 3600 s	
Data path	for b/w model: 8 bit or 12 bit for color model: 8 bit or 12 bit Raw RGB + YUV422/YUV411	
Binning	for b/w model: 2 x 2 for color: not supported	
Partial scan	Unit: 4 x 4	
Trigger	external / software	
Strobe	normal / trigger	
Gain [dB]	0 - 18 (manual or auto)	
Lens	C- / CS-mount	
Scanning system	progressive scan	
Control function	for b/w: brightness, sharpness, gamma, auto-exposure, auto-gain, auto-shutter for color: brightness, sharpness, gamma, auto-exposure, auto-gain, auto-shutter, U/B, V/R, Hue/G (digital gain), auto white balance	
Feature save/load	9 channels (0: factory, 1-4: feature, 5-8: mode/feature)	
SIO (RS-232)	path through or NET command	
S/N ratio [dB]	> 56	
Interface	Gigabit Ethernet interface according to GiGE vision standard / 1 Gbps	
Operating temperature	-5 to +45 °C	
Dimension (WxHxD) [mm]	55 x 55 x 44.5	
Regulations	FCC, CE, RoHS	
Power consumption	+8 VDC to +30 VDC	
Advanced features	auto iris lens control	

NET New Electronic Technology GmbH

Lerchenberg 7
86923 Finning, Germany
Tel: +49 8806 9234 0
Fax: +49 8806 9234 77
info@net-gmbh.com
www.net-gmbh.com

NET Italia S.r.l.

Via Carlo Pisacane, 9
25128 Brescia, Italy
Tel: +39 030 5237 163
Fax: +39 030 5033 293
info@net-italia.it
www.net-italia.it

NET USA, Inc.

3037 45th Street
Highland IN 46322, USA
Tel: +1 219 934 9042
Fax: +1 219 934 9047
info@net-usa-inc.com
www.net-usa-inc.com

NET Japan Co., Ltd.

2F Shin-Yokohama 214 Bldg.
2-14-2 Shin-Yokohama, Kohoku-ku,
Yokohama-shi, 222-0033, Japan
Tel: +81 45 478 1020
Fax: +81 45 476 2423
info@net-japan.com
www.net-japan.com

Technical changes, errors and omissions excepted. 10/2013

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101